


- FRESH AIR VENTILATION
- HIGH ENERGY EFFICIENCY

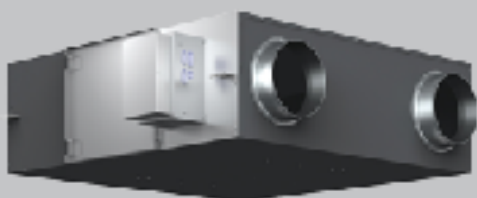

AIR-TO-AIR HEAT EXCHANGER

Features

The units for heat recovery use the waste heat to condition the supply air. So the demand for the air conditioner can be decreased and the condition inside the room becomes better. At the same time the energy consumption for heating or cooling of the air can be reduced to up to 70%.

Key features

- 5 sizes with airflow of 70 to 280 l/s available
- Recovery up to 70% of the energy of the waste air
- Increasing of the energy efficiency, particularly during the cold or hot season

Air handling unit		
Power supply	(V)	230
Power consumption [cooling]	(kW)	0,162
Power consumption [heating]	(kW)	0,162
Dimensions (H/W/D)	(mm)	900/900/290
Net weight	(kg)	38
Air flow volume	(m ³ /h)	210/350
Sound pressure level, cooling	(dB(A))	27,00/35,50
Pipe connections		150
Outdoor temperature, cooling	(°C)	-15 - +43
Outdoor temperature, heating	(°C)	-15 - +43

TOSHIBA Leading Innovation >>>

Retailing specialist:

